



Hall Lantern & Arrival Gong


The new elegant surface mounted Hall Lantern & Arrival Gong unit from J&L Elevator Components

Combine Practicality with Elegance and Innovation

- ▶ Combined Hall Lantern & Arrival Gong Unit
- ▶ Surface Mounted for easy of installation
- ▶ Full 180 degree viewing angle
- ▶ Innovative glass prism Hall Lantern display
- ▶ Selectable chimes for up and down direction
- ▶ Complies with DDA regulations



Dimensions

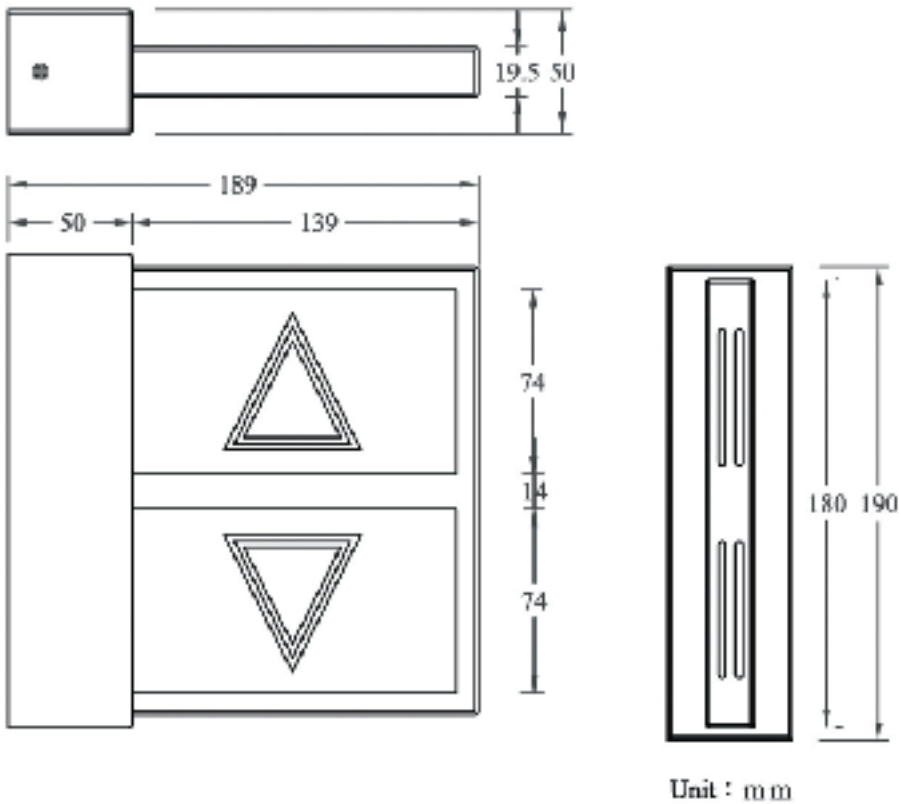


Hall Lantern & Gong Unit

JL 2401-1

Specification

| | | |
|-------------------------------|--|-------|
| Standard voltage | DC 24V | |
| Voltage range | DC 18V - DC 35V | |
| Standby consumption power | 0W | |
| Standby consumption current | 0A | |
| Operation consumption current | Standard | 128mA |
| | Low input voltage | 115mA |
| | High input voltage | 113mA |
| Gong volume | 79db/30c, | |
| Chime type | 6 types of landing chime, 2 types of music | |
| Dimension (L x W x H) | 190 x 189 x 50 | |
| Weight | 1311g | |

Wiring Diagram

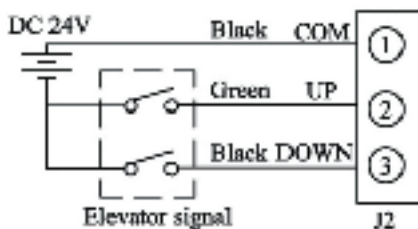

Sound Selection Table

| FIN DMP SW | UP | DOWN |
|---------------|-----------------|-------------|
| ON 1 2 3 | 2 tones (1) | 4 tones (2) |
| ON 1 2 3 | single tone (1) | 2 tones (3) |
| ON 1 2 3 | single tone (2) | 2 tones (4) |
| ON 1 2 3 | music (3) | music (2) |

