
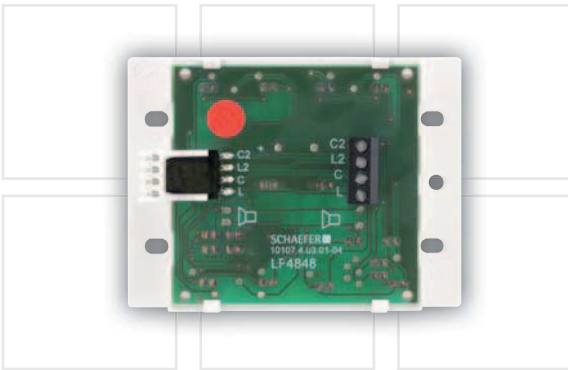
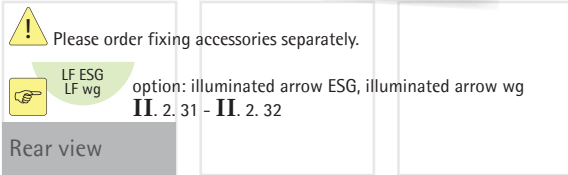


LP 4848 LED

Illuminated Arrow 4848 LED



Characteristics

Fixing
Faceplate thickness
Connection technology

welding studs M3 x 12 (faceplate fixing)

2 mm or 3 mm

AWG 26 - 28



0.1 mm² ... 1 mm²

Illuminated arrow

2 mm or 3 mm

opal

LED



red

LED



green

LED



Recall light



LED



option
U = 30 V
U = 12 V

I₁, I₂ = approx. 50 mA
I total = approx. 100 mA

Illumination
Compliance

arrow illumination

option: combination with illuminated arrow





LP 4848 ESG



LP 4848 wg

Dimensions

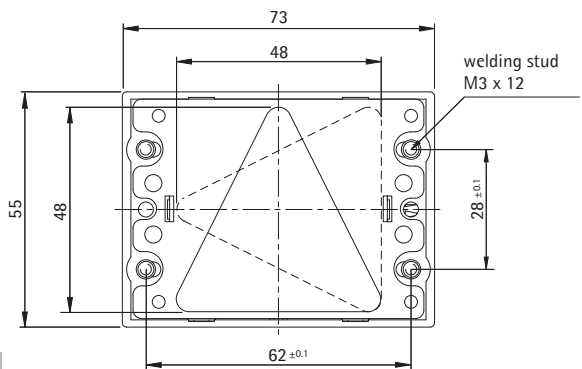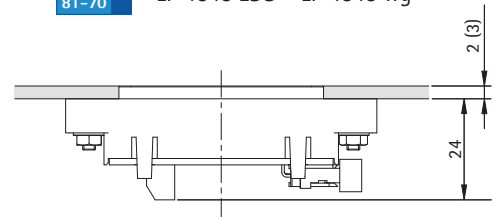

Cutout

Wiring diagram

