






LCD 128 H


Liquid Crystal Display 128, horizontal

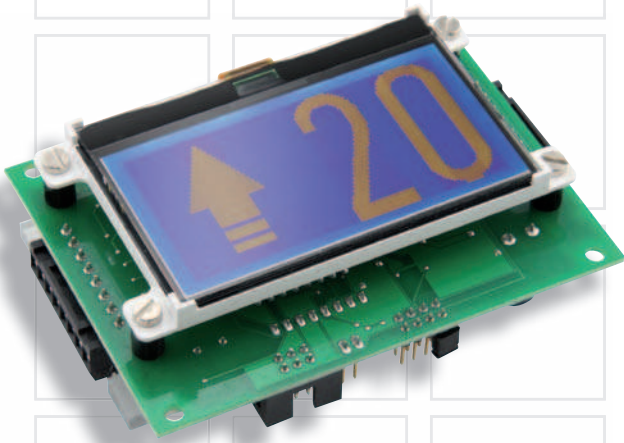


Characteristics

Description	liquid crystal display with high graphical resolution
Colours	<ul style="list-style-type: none"> blue red green white <ul style="list-style-type: none"> • white fond / blue background (standard) • red fond / black background • green fond / black background • white fond / black background
Height of characters	30 mm
Fixing	welding studs M3 x 10
Power supply	12 V ... 30 V DC smoothed
Current consumption	50 mA
Resolution	128 x 64 pixel
Display area	64 mm x 32 mm
Pane LCD 128	crystal clear, 2 mm or 3 mm
Temperature range	0 °C ... + 65 °C
Control	dual, gray, 1 out of n
Connection	common anode or common cathode
Connection technology	 0.08 mm ² ... 1.0 mm ²
Configuration	configurable via jumper or LCD Configurator
Compliance	option: combination with pane    F LCD 128 ESG F LCD 128 wg
Number of floors	56 floors
Special information	3 special texts/graphics
Arrow	up / down / up-down

Rückansicht

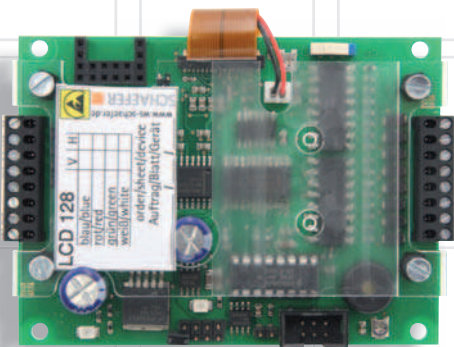

REVISION a Update LCD 128 H / 2010-06

 GUIDE II. 1. 65




option: Encoder II. 1. 60

LCD 128 H


Liquid Crystal Display 128, horizontal



Dimensions

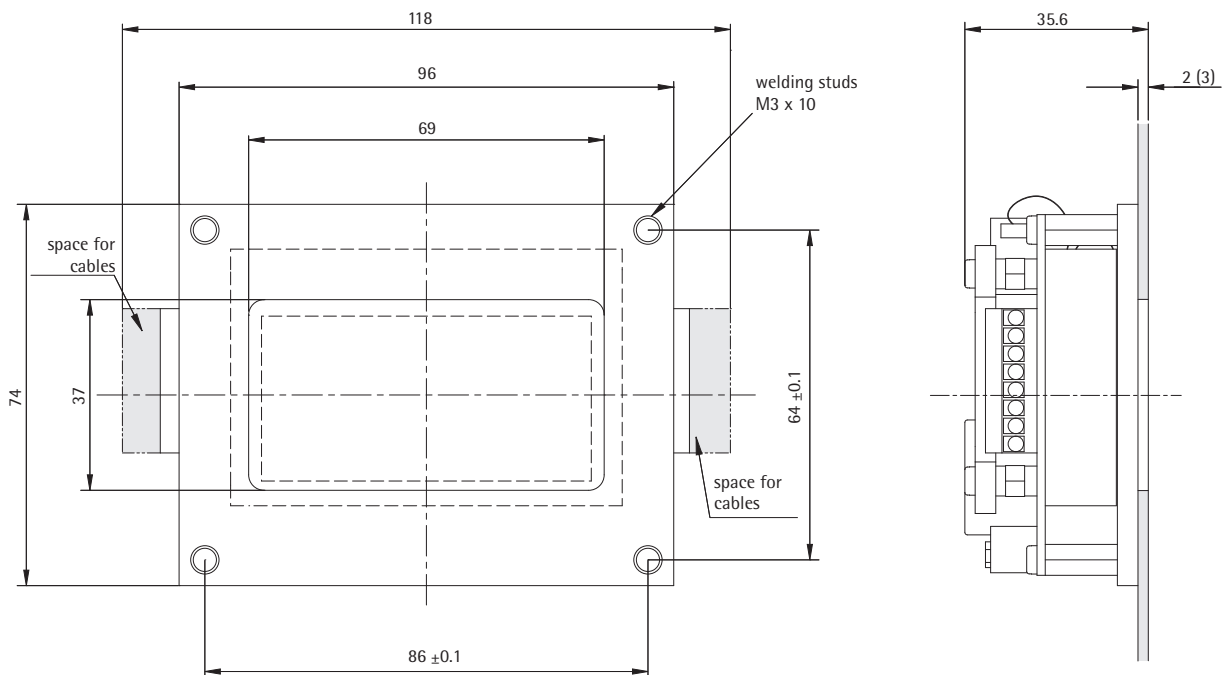


Cutout

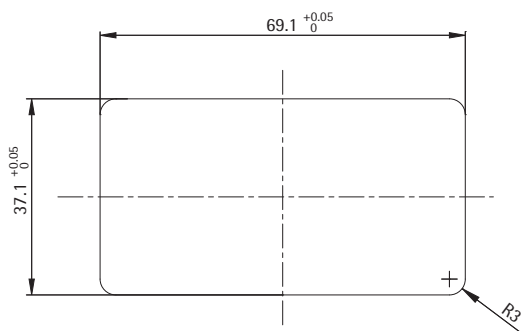

Mounting

SET PANE

SET MOUNTING LCD 128

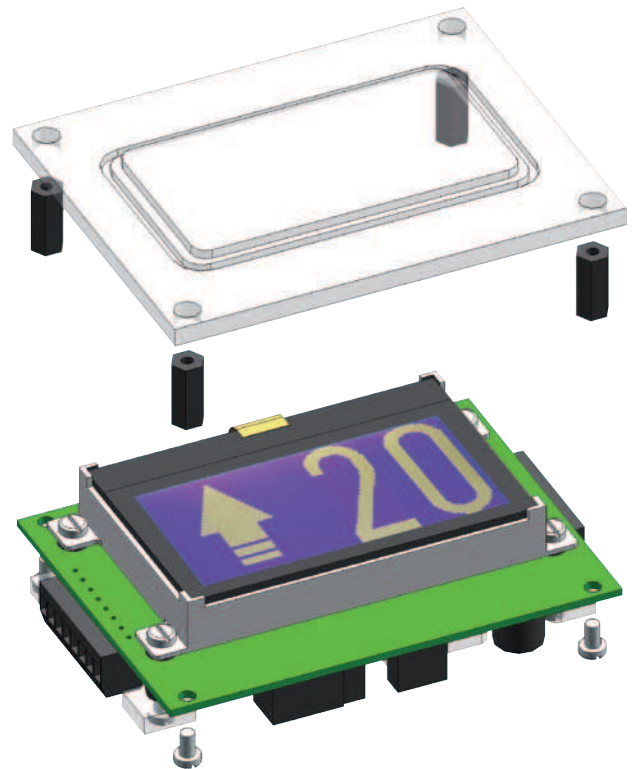

⚠ Please order fixing set/accessories pane separately.





⚠ on demand pane ESG, pane wg


LCD 128 V

Liquid Crystal Display 128, vertical




Characteristics

Description	liquid crystal display with high graphical resolution
Colours	blue red green white
Height of characters	30 mm
Fixing	welding studs M3 x 10
Power supply	12 V ... 30 V DC smoothed
Current consumption	50 mA
Resolution	64 x 128 pixel
Display area	32 mm x 64 mm
Pane LCD 128	crystal clear, 2 mm or 3 mm
Temperature range	0 °C ... + 65 °C
Control	dual, gray, 1 out of n
Connection	common anode or common cathode
Connection technology	 0.08 mm ² ... 1.0 mm ²
Configuration	configurable via jumper or LCD Configurator
Compliance	option: combination with pane    F LCD 128 ESG F LCD 128 wg
Number of floors	56 floors
Special information	3 special texts/graphics
Arrow	up / down / up-down

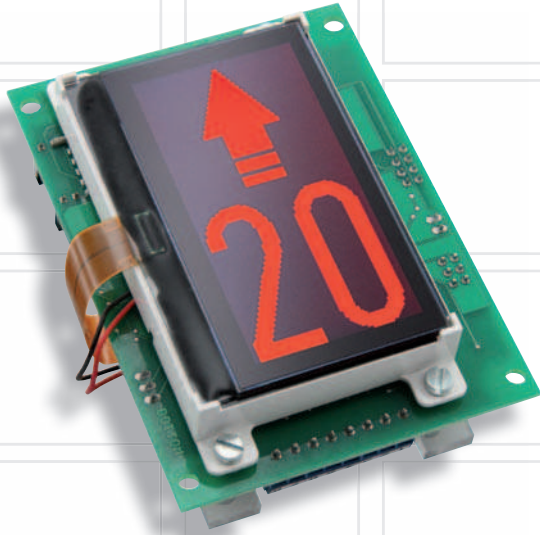

Rear view



 GUIDE II. 1. 65



ACCESSORIES




option: Encoder II. 1. 60

LCD 128 V


Liquid Crystal Display 128, vertical



Dimensions

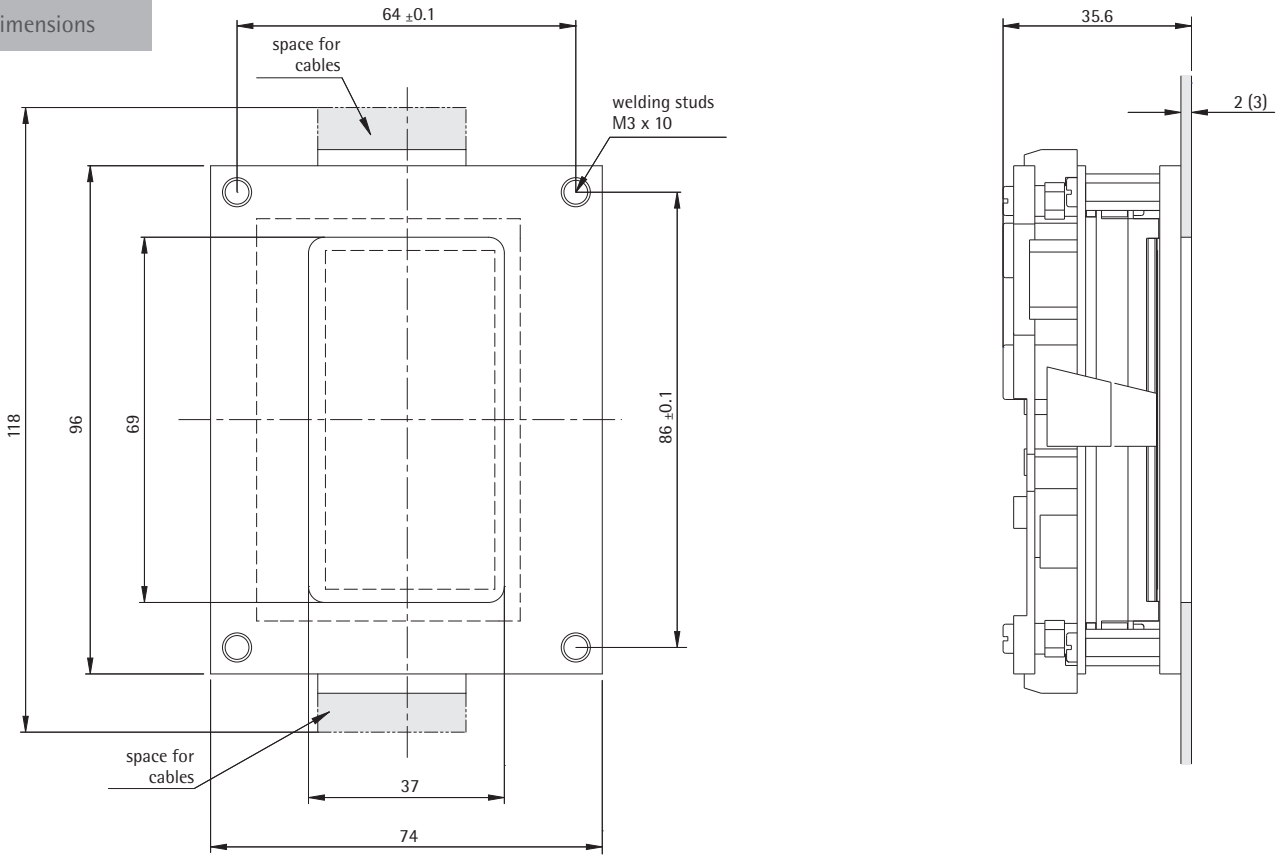


Cutout

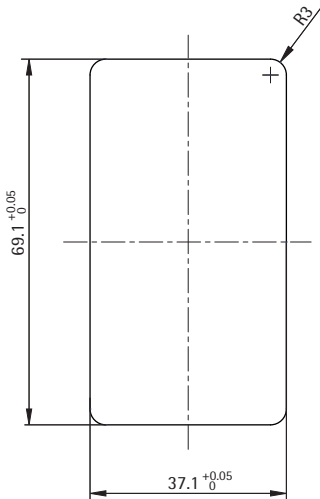

Mounting

SET_PANE

SET MOUNTING LCD 128

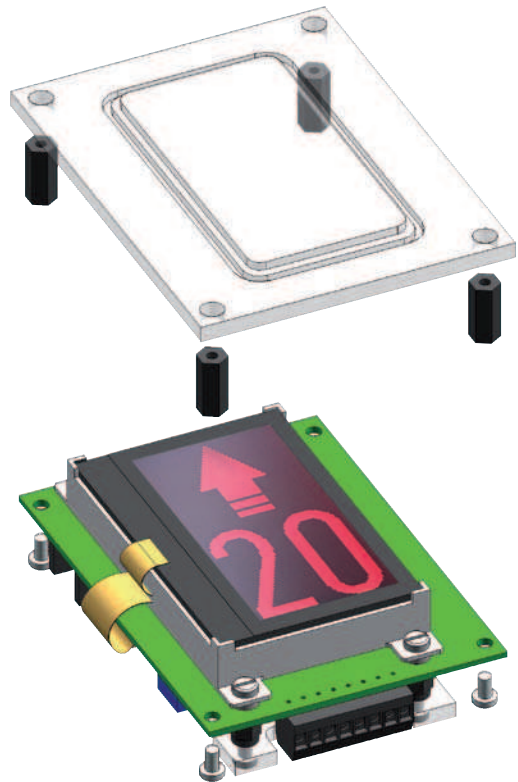

⚠ Please order fixing set/accessories pane separately.

⚠ on demand pane ESG, pane wg